




The **Baxter Sigma Spectrum** Infusion System was designed with features to help reduce errors when programming an IV infusion. You have the option of choosing the Baxter Sigma Spectrum, with software version 6.05 or the Baxter Sigma Spectrum with software version 6.02. For example, the Sigma Spectrum Infusion System automatically defaults to using the drug safety library at the initial start of the system. Small, lightweight and easy-to-use, the Sigma Spectrum Infusion System also offers wireless connectivity to integrate data into a hospital's EMR system and facilitate the transfer of data to and from the system for updating drug libraries as well as for continuous quality improvement reports.

Features

- Easy to set-up and program safely
- Bright, easy to read color display
- Quick drug find library search
- Configurable dose error reduction software

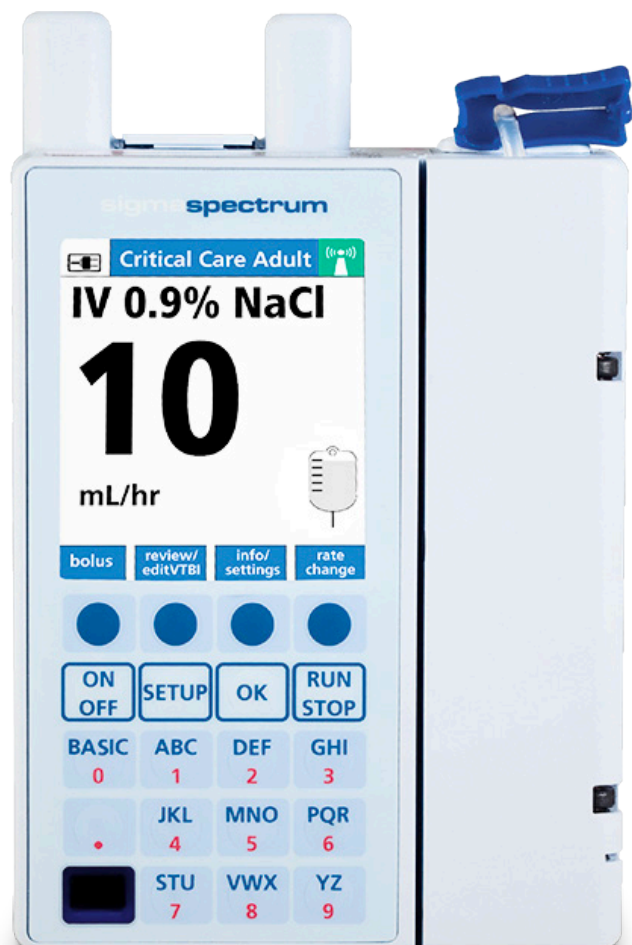

Specifications

Dimensions

With Standard Battery

Without IV Pole Clamp

Height: 5.8 In (14.73 cm)

Width: 4.2 In (10.67 cm)

Depth: 2.5 In (6.35 cm)

Weight: 1.6 lbs ± 0.06 lbs (25.5 oz ± 1 oz)

With IV Pole Clamp

Height: 5.8 In (14.73 cm)

Width: 6.4 In (16.26 cm)

Depth: 4.7 In (11.94 cm)

Weight: 2.1 lbs ± 0.06 lbs (33.5 oz ± 1 oz)

With Wireless Battery Module

Without IV Pole Clamp

Height: 6.3 In (16 cm)

Width: 4.2 In (10.67 cm)

Depth: 2.5 In (6.35 cm)

Weight: 1.7 lbs ± 0.06 lbs (26.5 oz ± 1 oz)

With IV Pole Clamp

Height: 6.3 In (16 cm)

Width: 6.4 In (16.26 cm)

Depth: 4.7 In (11.94 cm)

Weight: 2.2 lbs ± 0.06 lbs (34.5 oz ± 1 oz)

Pumping Mechanism

Linear peristaltic

Infusion Modes

Primary and Secondary, Multi-Step, and Cyclic TPN

Total Volume

0.1 to 999 mL with 0.1 mL increments from 0.1 to 99.9 mL and 1.0 mL increments from 100 to 999 mL

Flow Rate

0.5 to 999 mL/hr with 0.1 mL/hr increments from 0.5 to 99.9 mL/hr and 1.0 mL/hr increments from 100 to 999 mL/hr

Max Pump Pressure

28 PSI

Occlusion Pressure

Adjustable: High (19 ±9 PSI), Medium (13 ±6 PSI), and Low (6 ±4 PSI)

