




The **Philips IntelliVue MP5** patient monitor delivers IntelliVue monitoring power and functionality in a small, sturdy housing to match the demands of different care environments. The IntelliVue MP5 monitors give care teams throughout the hospital more information to assess patients and make confident decisions. The MP5 is built on a world-class IntelliVue platform with its easily recognizable and user-friendly interface. Clinicians are able to easily navigate through one-step smart touch commands with the integrated touchscreen.

Features

- Compact, rugged, lightweight monitor with built-in measurements
- ECG monitoring using any combination of three to 10 electrodes.
- 12-lead ECG monitoring with five electrodes using the EASI method or with 10 electrodes using the conventional method.
- Multi-lead arrhythmia and ST segment analysis at the bedside on all available leads.
- Respiration Mainstream or Sidestream CO₂.
- FAST SpO₂ for accurate performance even with low perfusion.

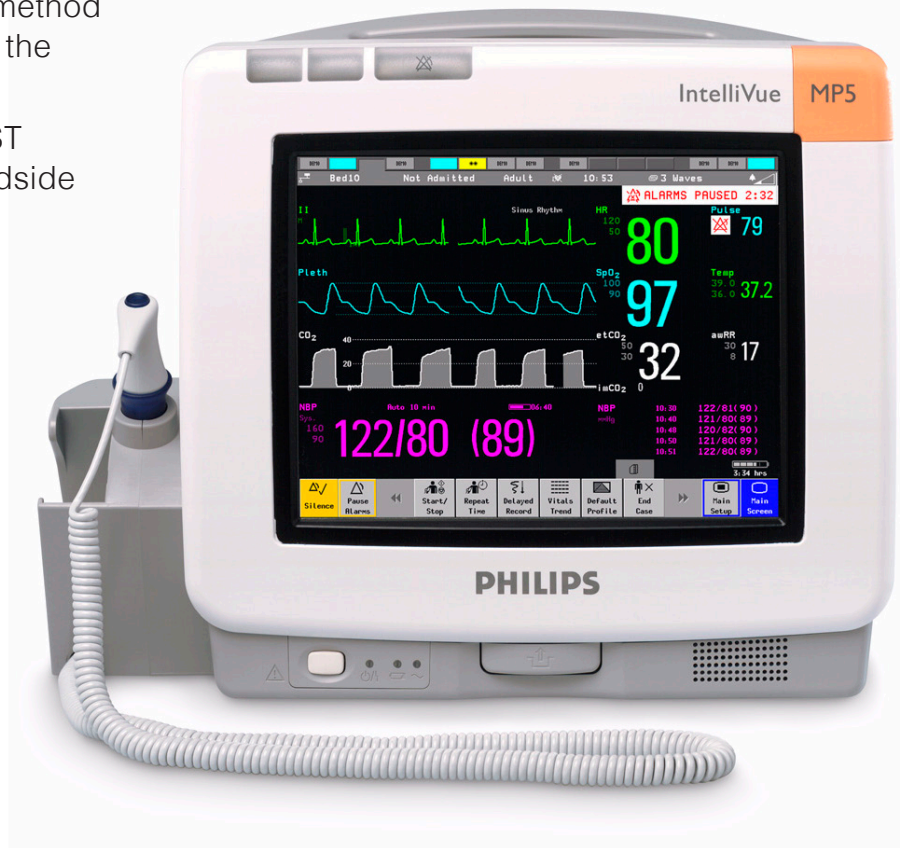

Specifications

Dimensions

Height: 9.76" (24.8 cm)
Width: 10.2" (25.9 cm)
Depth: 7.32" (18.6 cm)
Weight: 8.8 lbs (4 kg)

Display

Type: SVGA
Resolution: 800 x 600
Refresh Rate: 60 Hz
Size: 8.4" (21.3 cm)

Power

Power Consumption: < 40W average; < 65W Peak
Line Voltage: 100 to 240 V ~
Current: 1.3 to 0.7A
Frequency: 50/60 Hz

Sweep Speeds

6.25, 12.5, and 50 mm/s with +/- 5% accuracy

Battery

Type: Lithium-Ion
Capacity: 6000 mAh
Voltage: 10.8 V
Weight: 480g (Per battery)
Charge Time: 4 hours (When off); 5 hours or more when on
Operating Time: 4 Hours (Basic monitoring configuration); 3 hours (Extended monitoring configuration)

Operating Environmental Specifications

Temperature: 32 to 104°F (0 to 40°C)
Humidity: 15 to 95% non condensing
Altitude: 10,000 ft (-500 to 3000 m)

Storage Environmental Specifications

Temperature: -4 to 140°F (-20 to 60°C)
Humidity: 5 to 90% non condensing
Altitude: 15,000 ft (-500 to 4600 m)

